


FUSO

CANTER






Lalong Pinalakas! Lalong Pinatibay!

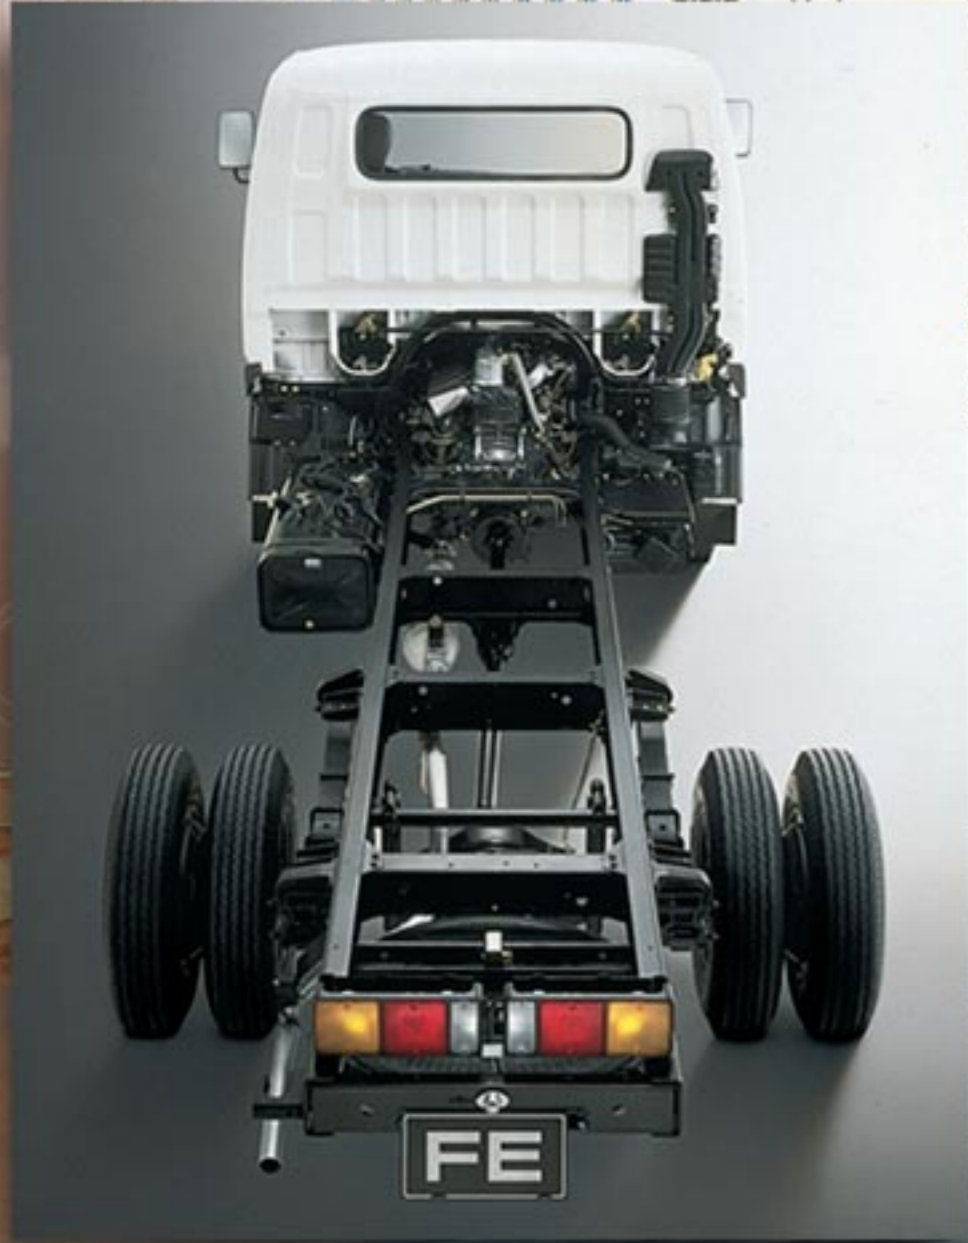

Strong, Reliable and Durable Chassis.
Improvements on the chassis were made to ensure strength and durability as well as safety. Mas matatag!

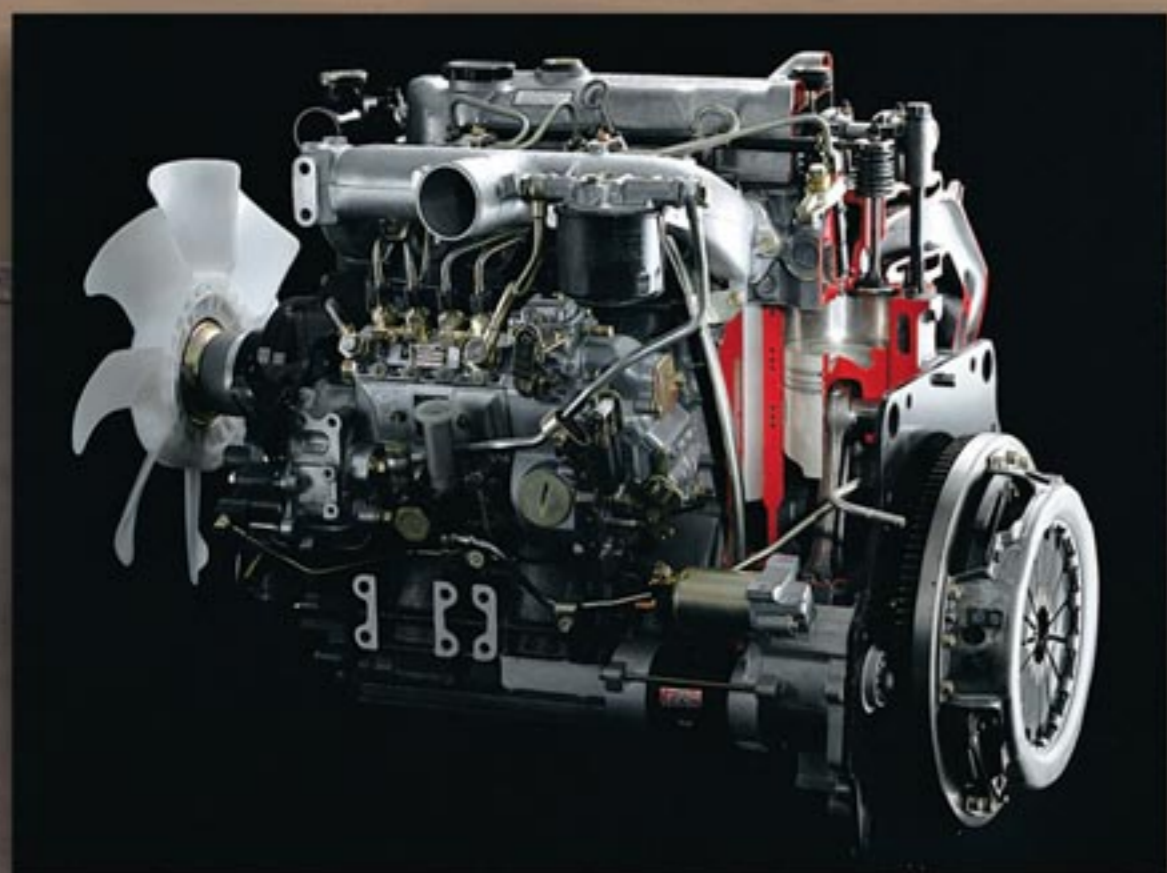

Mitsubishi 4D34-2A Direct Injection Diesel Engine.
Provides more power and torque. Mas malakas sa hatakan!

- Max. Output: 105PS/3200rpm
- Max. Torque: 25kg-m/1800rpm



Superior Cabin and Interior
Aside from a visually exciting and aerodynamically efficient cab, the Canter boasts of a very comfortable cabin with car-like features. Mas gwapo!

FUSO CANTER

FE 519 4 Wheeler

FE 639 6 Wheeler

DIMENSIONS

Overall Length (mm)	4660	5925
Overall Width (mm)	1695	1995
Overall Height (mm)	1995	2180
Ground Clearance (mm)	200	200
Wheelbase (mm)	2500	3350
Track (Front/Rear) (mm)	1390/1380	1655/1495
Cab to Rear Axle (mm)	2030	2825
Cab to End Frame (mm)	3090	4300
Frame Width (mm)	700	750
Front Overhang (mm)	1000	1045
Rear Overhang (mm)	1060	1475
Crew (persons)	3	

WEIGHTS

Gross Weight (kg)	4300	5700
Kerb Weight (kg)	1775	2105

CALCULATED PERFORMANCE

Max. Speed (km/h)	118	112
Max. Gradeability (tan 0)	47.00%	35.50%
Max. Turning Radius (m)	5.1	6.3

ENGINE

Model	4D34-2A	
Type	4 in-line, 4 stroke, water cooled	
Fuel System	Direct Injection	
Displacement (cc)	3907	
Bore and Stroke (mm)	104 x 115	
Max. Output PS/rpm	104.7/3200	
Max. Torque Kg-m/rpm	25/1800	

TRANSMISSION

Clutch	Hydraulic Control, Single Dry Plate	
Type	5 Forward and 1 Reverse Speed	
Gear Type	1st to 5th - Synchronesh Gears Reverse - Constantmesh Gears	
Gear Ratios	1st	5.181
	2nd	2.865
	3rd	1.593
	4th	1.000
	5th	0.739
	Reverse	5.181
	Final	5.714
		6.166

SUSPENSION

Front	Reverse Elliot "I" Beam Type on Laminated Leaf Springs	Reverse Elliot "I" Beam Type on Laminated Leaf Springs
Rear	Full Floating Type on Laminated Leaf Springs	

BRAKES

Service	Hydraulic with Vacuum Servo Assistance, Dual Circuit	
Parking	Internal Expanding Type on Propeller Shaft	

STEERING

Type	Ball Nut Type with Intergral Hydraulic Power Booster	
------	--	--

TIRES

Front	7.50 - 15 - 12PR	7.00 - 16 - 10PR
Rear	7.50 - 15 - 12PR	7.00 - 16 - 10PR

MISCELLANEOUS

Fuel Tank	Liters	70	100
Generator	12 Volt, AC, 35 Amp.		
Batteries	@ 20hr. Rate	12 Volt x 2, 65 Ah	
Air Cleaner	Dry Paper Element Type		
Suction	Snorkel and Rain Cap		
Governor	All Speed Type		

1. Mitsubishi Motors Philippines Corporation reserves the right to alter any specifications without prior notice.
2. Photo may vary from actual unit. Rear body, body skirting and cab spoiler are optional.



FE 519 4 Wheeler

FE 639 6 Wheeler



© March 2006 - CANTER - 03 Mitsubishi Motors Philippines Corp.

On Quality
We seek excellence in our products and services
and recognize that Customer Satisfaction
is the essence of our mission

